

Assembly and Operation Instructions

ATTENTION: TO INSURE SAFE AND EASY USE OF YOUR WESCO TELEFOLDING TRUCK, READ THESE INSTRUCTIONS BEFORE USING.

Description

The Wesco Aluminum Telefolding Truck is designed specifically for transporting loads of up to 330 lbs. This multi-functional truck features a push button for quick conversions/storage, moldon rubber wheels, Anti-impact, non-skid polypropylene and aluminum deck and a rubber coated handle. The deck extends from 21" to 29.5". It is UPS shippable.

This product is distributed by:

Wesco Industrial Products, LLC
1250 Welsh Road
North Wales, PA 19454
Tel: 215-699-7031 Fax: 215-699-3836

Contact the factory for parts information and ordering.
Visit us on the web at www.wescomfg.com

Unpacking

When unpacking the Wesco Product, check carefully for shipping damage and missing parts. If damage has occurred or any parts are missing, file a claim with the delivering carrier within 24 hours and notify the dealer from whom the unit was purchased.

Warranty Repairs

If the unit does not work properly, contact your dealer or the factory (215-699-7031) for units less than 90 days old.

Non-Warranty Service


If units are older than 90 days, repairs can be made easily on site with factory supplied parts.

NOTE: Do not send units to the factory for service without first obtaining a "Return Merchandise Authorization" (RMA) number from the customer service department. We will not be responsible for merchandise returned without proper authorization.

Replacement Parts

Item	Part No.	Description	Qty.
1	272049	Hardware Kit	1
2	272050	Swivel Caster	2
3	272051	Rigid Caster	2
4	272111	Spring	1

Operation

 <p>Figure 1</p>	 <p>Figure 2</p>	 <p>Figure 3</p>	 <p>Figure 4</p>
<p>1) Press down push button and push front of truck in direction of arrow.</p>	<p>2) Step on bar at base of handle, then push handle down to set truck in the "tow position".</p>	<p>3) Step on bar at base of handle and fold handle forward to set truck in "compact position".</p>	<p>4) Truck is compact and easily stored.</p>

Assembly and Operation Instructions

ATTENTION: TO INSURE SAFE AND EASY USE OF YOUR WESCO TELEFOLDING TRUCK, READ THESE INSTRUCTIONS BEFORE USING.

Assembly

The shipped package includes the Handle Assembly, Base Assembly, boxed rigid casters with hardware and boxed swivel casters with hardware. Overall it should include the following parts:

Item	Description	Quantity
1	Handle Assembly	1
2	Base Assembly	1
3	Swivel Casters	2
4	Rigid Casters	2
5	Rigid Caster Bolt	8
6	Swivel Caster Bolt	8
7	Nuts	16

Note: Items Identified in Figure 6

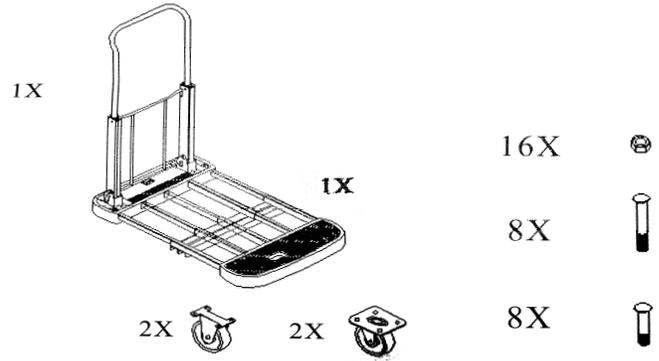


Figure 5

Instructions

- 1) Lay Base Assembly flat, facing down. Then align swivel caster assembly plate with holes of Base.
- 2) Insert screws from hardware packaged with swivel casters from underside through the base assembly and plate. Then tighten and lock in with nut
- 3) Flip Base Assembly, then set Handle Assembly on Base Assembly as shown figure 6.
- 4) Insert screws from hardware packaged with rigid casters through both the handle and base assembly.
- 5) Set rigid caster plate through screws, up against the Base Assembly. Then tighten and lock in with nut.

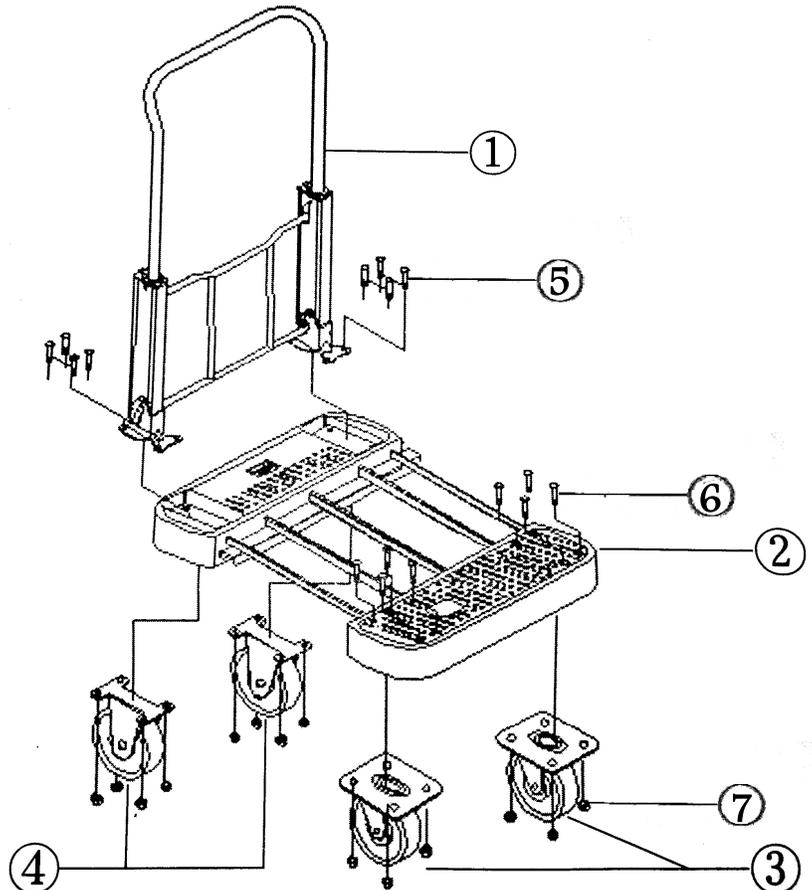


Figure 6