


220654

# AC ADAPTOR

MODEL: 4C24020  
 INPUT: 100-240VAC 50/60Hz 1.2A  
 OUTPUT: 24V = 2A  
 28V = 2A(BATTERY CHARGE)  
 TOTAL MAX. POWER: 56W

LED INDICATION:  
 ORANGE: CHARGING  
 GREEN: FULLY CHARGED  
 ITE POWER SUPPLY




CAUTION:  
 FOR INDOOR AND BATTERY USE ONLY.  
 DO NOT OPEN.



MADE IN TAIWAN  
 SERIAL. 022925



FEB 12 2018

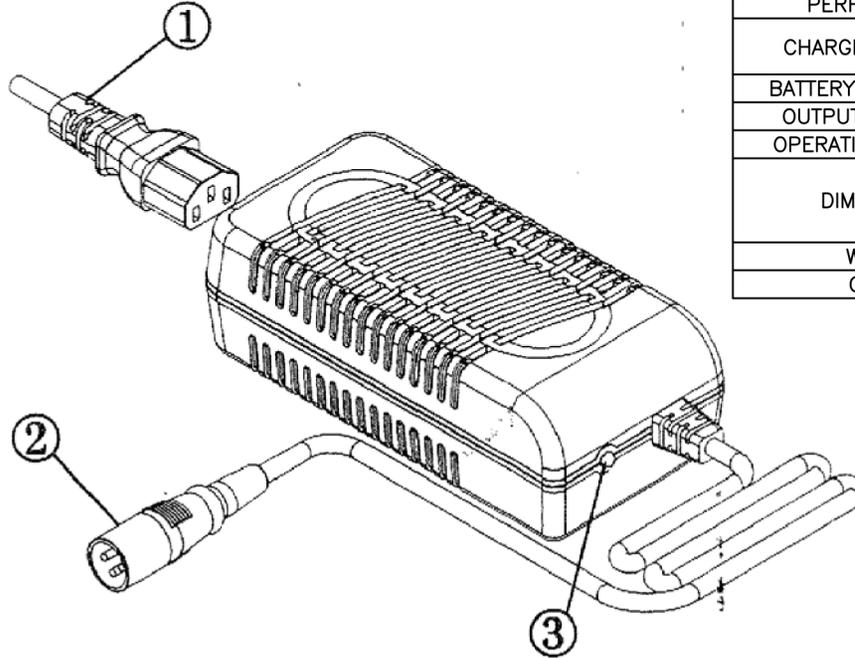

- ① POWER CORD
- ② OUTLET PLUG TO BATTERY
- ③ LED INDICATOR:  
 - ORANGE: CHARGING  
 - GREEN: FULLY CHARGED

## SPECIFICATIONS

ITEM	BATTERY CHARGER (SWITCHING MODE)	
MODEL	4C24020	
OUTPUT CURRENT (DC)	2 A	
CHARGING VOLTAGE (DC)	29.4 +/- .5 V	
FLOATING CHARGE V (DC)	27.6 V	
INPUT CURRENT (AC)	1.2 A Max.	
INPUT VOLTAGE (AC)	100-240V, 50/60 Hz	
EFFICIENCY	AC-DC 80%	
PERFORMANCE	SWITCHING MODE	
CHARGING METHOD	PULSE MODE CONSTANT CURRENT - TWO STAGE CONSTANT VOLTAGE	
BATTERY APPLICATION	LEAD ACID BATTERIES	
OUTPUT DETECTION	SHORT CIRCUIT PROTECTION	
OPERATING HUMIDITY	20%-85%	
DIMENSIONS	LENGTH	6.5 in (165 mm)
	WIDTH	3.125 in. (80 mm)
	HEIGHT	2 in. (50 mm)
WEIGHT	1.2 lbs (550 g)	
COLOR	BLACK	

THIS DRAWING IN ALL PARTICULARS IS WESCO INDUSTRIAL PRODUCTS, LLC PROPERTY. ALL RIGHTS OF DESIGN, INVENTION OR USE OF ARE RESERVED.

PRINT ISSUED

FEB 06, 2019

WESCO MANUFACTURING  
 ENGINEERING DEPARTMENT

REV. EON & DATE REVISIONS APP	WESCO INDUSTRIAL PRODUCTS, LLC		PENNA. 19454	
	NORTH WALES		DRAWN: BS 02-06-19	
	PART NAME CHARGER: REPLACEMENT (COBRA PRO)		CHECKED:	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		APP. ENGR.	
FRACTION		3 PLACE DECIMAL	2 PLACE DECIMAL	SCALE:
± 1/64		± .005	± .01	
ANGULAR ± 1-1/2°		SHEET 1 OF 1	B-220654 REV A	
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS				